



Surge Protection

For comprehensive protection of a luminaire against electrical surges, surge protection shall be installed on the mains supply where required to protect luminaires and drivers from transient voltage damage.

For warranty information visit [unios.com/warranty](https://unios.com/warranty)

Please read these installation instructions carefully before installing this luminaire. This product must be installed and maintained by a suitably qualified person/s in compliance with the latest applicable regulations and relevant legislation. Unios does not warrant any claim based on defects or damage caused by misuse, improper installation, improper operation and/or modifications carried out by the purchaser or third parties. This luminaire will not be used as a 'Working light' during construction. This will result in the warranty of the luminaire to be void. For warranty duration, please refer to the data sheet.

Cleaning

Always clean carefully using a soft cloth and a ph-neutral, alcohol-free, non-abrasive cleaning cloth. Clean & Maintain the finish twice a year to avoid rust, oxidation or limescale deposits. If this entire surface is not cleaned correctly, the finish may become uneven.

Do not use abrasive pads, discs, sandpaper and/or high pressure hose/gun to clean the luminaire.

Disposal

Ensure correct disposal of this product (waste electrical and electronic equipment)



Kobe G2 Recessed Spotlight  
Installation Instructions  
[unios.com/koberecessedims](https://unios.com/koberecessedims)



Kobe G2 Surface Mounted Spotlight  
Installation Instructions  
[unios.com/kobesmims](https://unios.com/kobesmims)




Kobe **G2**

TRACK LIGHT

|            |                                     |                       |                         |                        |                     |  |
|------------|-------------------------------------|-----------------------|-------------------------|------------------------|---------------------|--|
| Base Codes | Mini<br>KOBEN306                    | Small<br>KOBES315     | Medium<br>KOBEM325      | IP20                   |                     |  |
|            | Input Voltage<br>220–240V ~ 50/60Hz | Material<br>Aluminium | Operating Temp<br><25°C | Install Person/s<br>1x | Power<br>6-25 Watts |  |



**CAUTION – This product must be installed by a qualified installer**  
Please read instruction manual carefully before installing luminaire

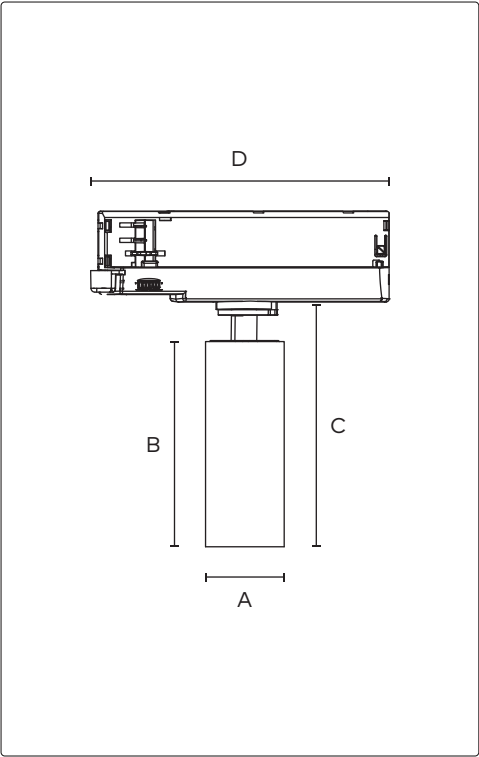

Sizing Variations


| Product Code | A   | B   | C   | D   |
|--------------|-----|-----|-----|-----|
| KOBEN306     | Ø40 | 80  | 100 | 189 |
| KOBES315     | Ø40 | 105 | 125 | 189 |
| KOBEM325     | Ø55 | 150 | 173 | 189 |

All measurements are in millimetres.

Additional Accessories

|                                     |                                       |
|-------------------------------------|---------------------------------------|
| <br>Primary optic<br>See data sheet | <br>Secondary Optic<br>See data sheet |
|-------------------------------------|---------------------------------------|

Product Assembly

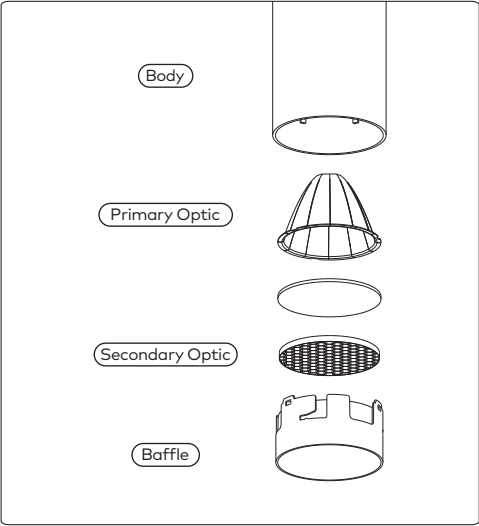

Product Installation

CAUTION




Switch off main electrical power prior to installing and powering this luminaire.

Do not open luminaire whilst the main electrical power is active.




Unlocked

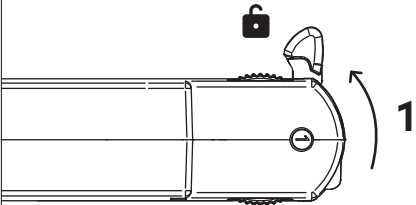


Ensure track toggle is unlocked.

MX 1C Track




MX 3C Track



Align the markings on the luminaires track adaptor with the track.

Locked

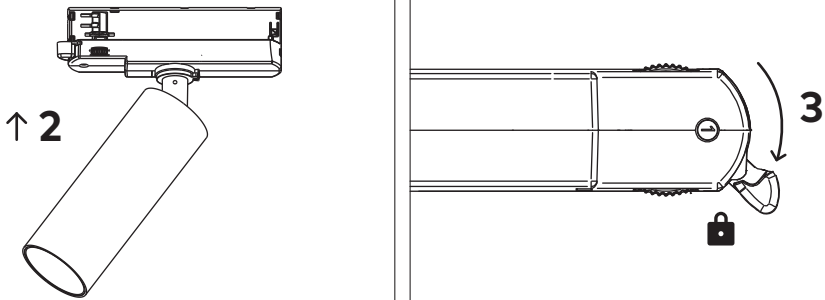


Insert luminaire into a suitable MX Track (Check Track compatibility Table).

Switch track toggle to the locked position to lock luminaire in place.

Product Adjustments


Circuit Selection

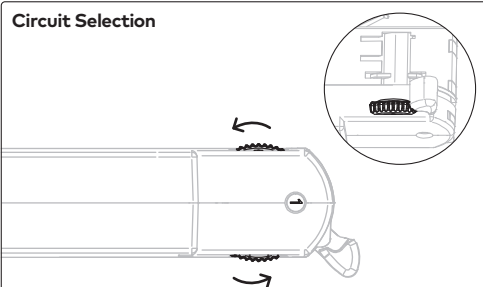

Sequence: ③ - Off - ① - Off - ②

Rotate dial to select desired track/circuit

Tilt & Rotation

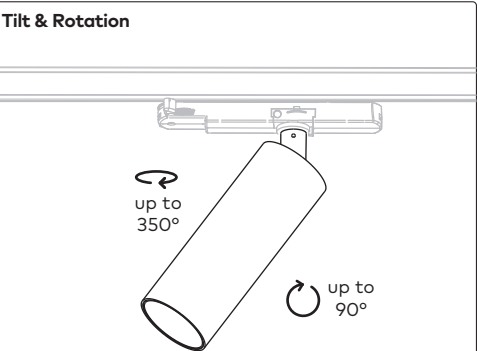

Tilt and rotate product as desired

Track Compatibility

| Track Adaptor                 | MX1 | MX3 | MX5 |
|-------------------------------|-----|-----|-----|
| Single Circuit (Phase-Cut)    | ●   | ○   | ○   |
| Three Circuit (Phase-Cut)     | ○   | ●   | ○   |
| Three Circuit (DALI)          | ○   | ○   | ●   |
| BasicDIM Wireless (Bluetooth) | ○   | ●   | ●   |

Refer to the MX Track Instruction Manual Sheet for track wiring.

Dimming

Standard models are phase-cut dimmable. Unios recommends a phase-cut dimmer optimised for LED technology. DALI compatible drivers are also available.

If paired with Tempo Dim model, MX circuit must not be paired with a phase-cut dimmer. For full list of compatible drivers, see unios.com

