


IP65/66 Installations

❗ Failure to provide a suitable installation area will lead to water ingress and will void the product's warranty.

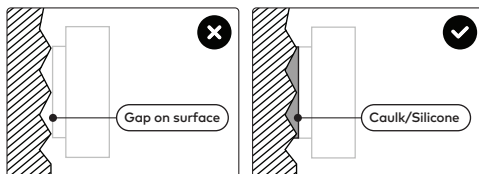


Fixture needs to be installed on a flat, level surface. Caulking & use of silicone on all wall plates/mounts is mandatory on uneven or porous surface. Use caulk or silicone to fill gaps between back plate and surface. Do not caulk or apply silicone on the factory provided seal as it will have an adverse sealing effect.

Refer to the Warranty Terms & Conditions. For more information see unios.com/warranty.

Cleaning

Warning: Before cleaning, disconnect from mains supply and allow luminaire to cool.

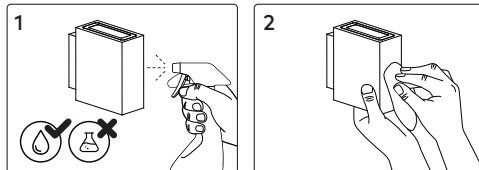

Disposal

Ensure correct disposal of this product (waste electrical and electronic equipment).



Corrosion Protection

It is important to note that care must be taken during installation or maintenance to ensure that the surface of the luminaire is not damaged. Any damage, which is exposed to moisture will result in corrosion occurring.

Please also note that any chemical applications on the luminaire or chemical contact via installation will cause corrosion of the surface of the luminaire and will void the warranty.

Ambient Conditions

Recommended to install in an ambient temperature <35°C.



Athena G2

SERIES  

Base Codes	Surface Mounted ATSM0018	Fixed One ATF10018	Fixed Two ATF20028	Power 18 28 Watts
	Class I 220–240V – 50/60Hz	IP Rating 65	Material Aluminium	Install Person/s 1x 
   				


❗ **CAUTION – This product must be installed by a qualified installer**
Please read instruction manual carefully before installing luminaire

 **Surge Protection**
For comprehensive protection of a luminaire against electrical surges, surge protection shall be installed on the mains supply where required to protect luminaires and drivers from transient voltage damage.

For warranty information visit unios.com/warranty

Please read these installation instructions carefully before installing this product. This product must be installed and maintained by a suitably qualified person/s in compliance with the latest applicable regulations and relevant legislation.

Unios does not warrant any claim based on defects or damage caused by misuse, improper installation, improper operation and/or modifications carried out by the purchaser or third parties. This product shall not be used as a 'working light' during construction. This will result in the warranty of the product to be void. For warranty duration, please refer to the data sheet.

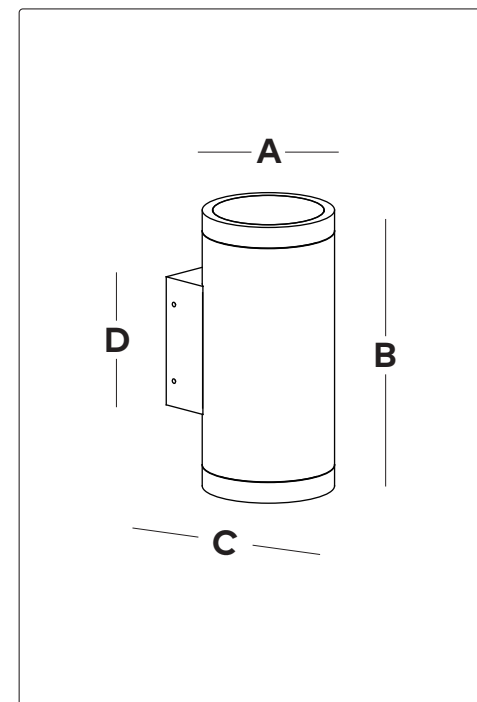


Sizing Variations

Product Code	A	B	C	D
ATSM0018	Ø100	145	-	-
ATF10018	Ø100	165	119	100
ATF20028	Ø100	215	119	100


All measurements are in millimetres.

Parts & Accessories


 1x Allen Key	 4x Plugs	 4x Screws
 4x Seal Washers		

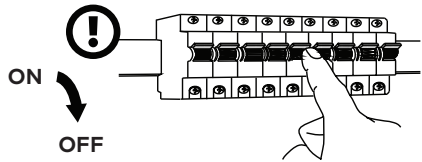



Surface Mounted
ATSM0018

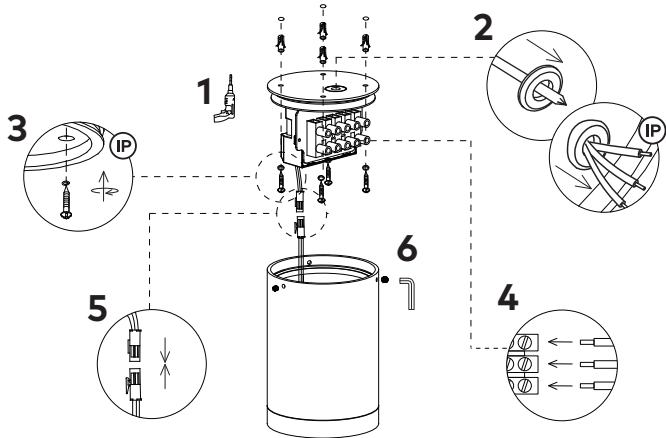

Wall
ATF10018
ATF20028

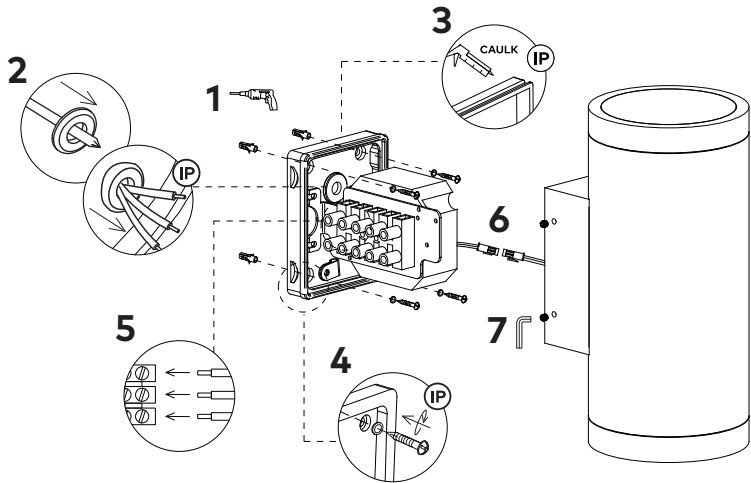

Wiring

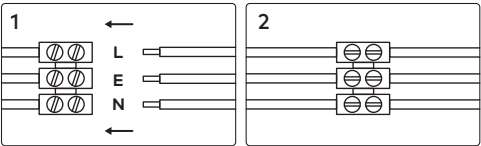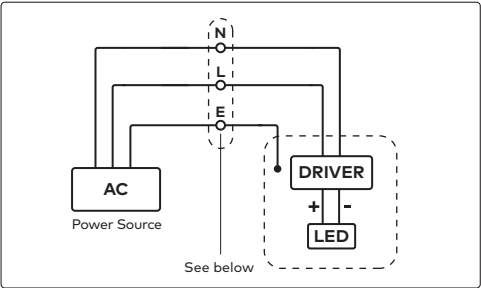

Driver Compatibility


Product Code	Output Power	Driving Current	Forward Voltage
ATSM0018	18W	500mA	36-38V
ATF10018	18W	500mA	36-38V
ATF20028	28W	800mA	36-38V

Dimming



This luminaire can be dimmed. Unios® recommends a phase-cut dimmer or DALI solution optimised for LED technology.

For full list of compatible drivers, see unios.com



Additional Accessories



Wiring (Built-in DALI)

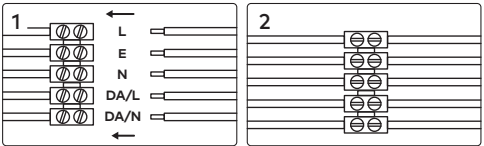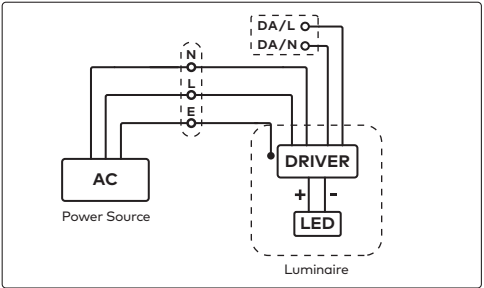

Mounting Plate

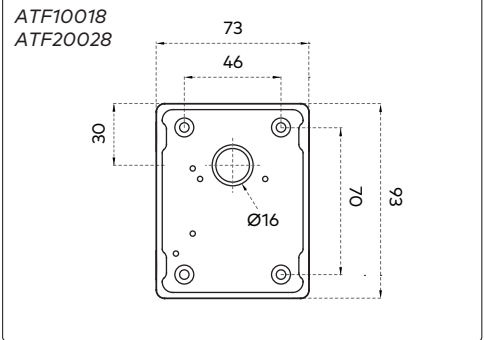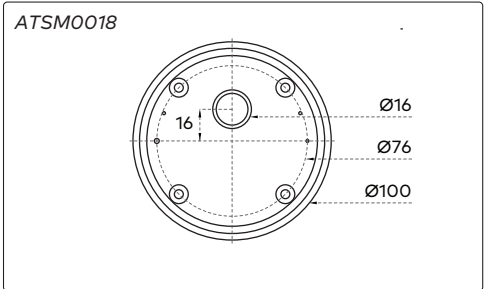

All measurements are in millimetres.

