



Mounting Plate

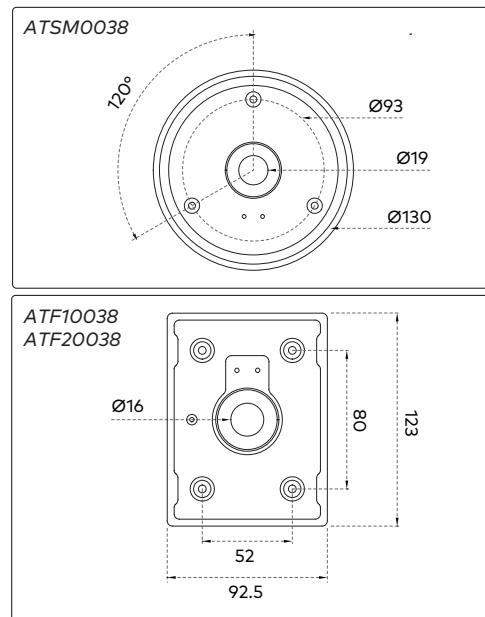

All measurements are in millimetres.

Cleaning

Warning: Before cleaning, disconnect from mains supply and allow luminaire to cool.

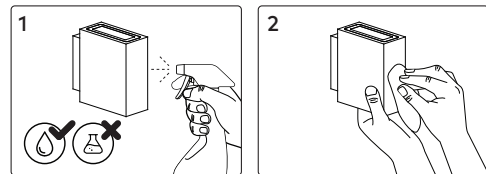

Disposal

Ensure correct disposal of this product (waste electrical and electronic equipment).



Ambient Conditions

Recommended to install in an ambient temperature <35°C.



Driver Compatibility

Product Code	Output Power	Driving Current	Forward Voltage
ATSM0038	38W	1000mA	27-40V
ATF10038	38W	1000mA	27-40V
ATF20038	38W	1000mA	27-40V


Dimming

This luminaire can be dimmed. Unios® recommends a phase-cut dimmer or DALI solution optimised for LED technology.

For full list of compatible drivers, see unios.com

IP65/66 Installations

Failure to provide a suitable installation area will lead to water ingress and will void the product's warranty.

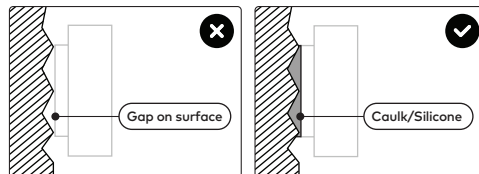

Fixture needs to be installed on a flat, level surface. Caulking & use of silicone on all wall plates/mounts is mandatory on uneven or porous surface. Use caulk or silicone to fill gaps between back plate and surface. Do not caulk or apply silicone on the factory provided seal as it will have an adverse sealing effect.

Refer to the Warranty Terms & Conditions. For more information see unios.com/warranty.

Corrosion Protection

It is important to note that care must be taken during installation or maintenance to ensure that the surface of the luminaire is not damaged. Any damage, which is exposed to moisture will result in corrosion occurring.

Please also note that any chemical applications on the luminaire or chemical contact via installation will cause corrosion of the surface of the luminaire and will void the warranty.

Athena Max

SERIES

Base Codes	Surface Mounted ATSM0038	Fixed One ATF10038	Fixed Two ATF20038	Power 38 Watts
	Class I 220-240V ~ 50/60Hz	IP Rating 66	Material Aluminium	Install Person/s 1x

CAUTION – This product must be installed by a qualified installer
Please read instruction manual carefully before installing luminaire

Surge Protection
For comprehensive protection of a luminaire against electrical surges, surge protection shall be installed on the mains supply where required to protect luminaires and drivers from transient voltage damage.

For warranty information visit unios.com/warranty

Please read these installation instructions carefully before installing this product. This product must be installed and maintained by a suitably qualified person/s in compliance with the latest applicable regulations and relevant legislation.

Unios does not warrant any claim based on defects or damage caused by misuse, improper installation, improper operation and/or modifications carried out by the purchaser or third parties. This product shall not be used as a 'working light' during construction. This will result in the warranty of the product to be void. For warranty duration, please refer to the data sheet.


Sizing Variations


Product Code	A	B	C	D
ATSM0038	Ø130	250	-	-
ATF10038	Ø130	250	151	131
ATF20038	Ø130	300	151	131

All measurements are in millimetres.


Parts & Accessories

 1x Allen Key	 Plugs ATSM (3x) ATF1/ATF2 (4x)	 Screws ATSM (3x) ATF1/ATF2 (4x)
 Seal Washers ATSM (3x) ATF1/ATF2 (4x)	 Catenary Accessory ATCA01 Suited for ATSM	

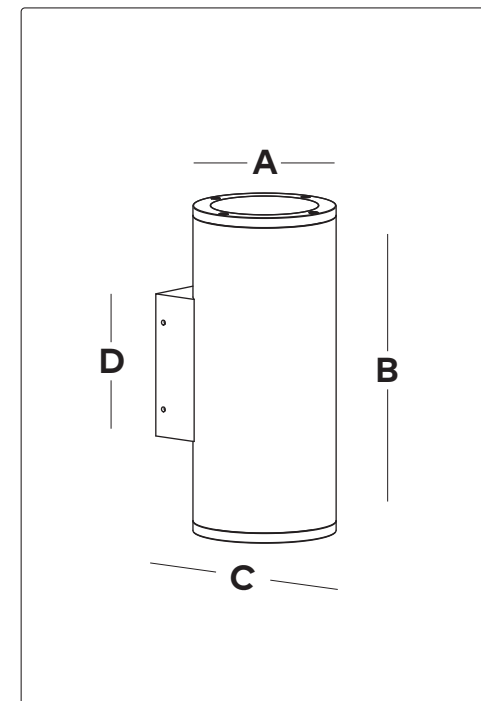


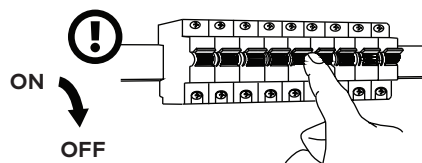

Surface Mounted ATSM0038

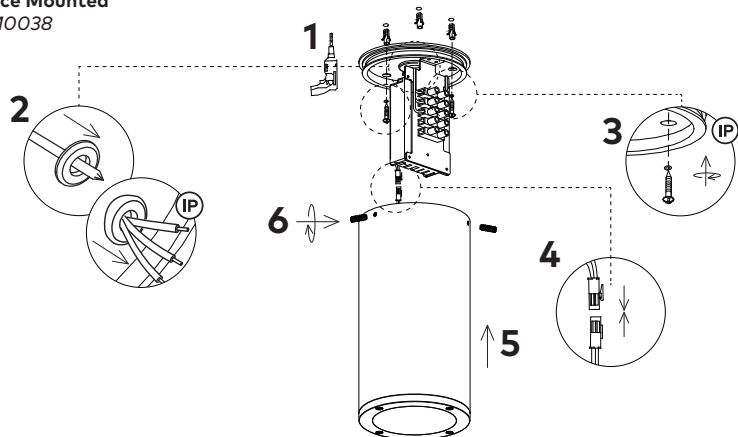


Wall ATF10038 ATF20038

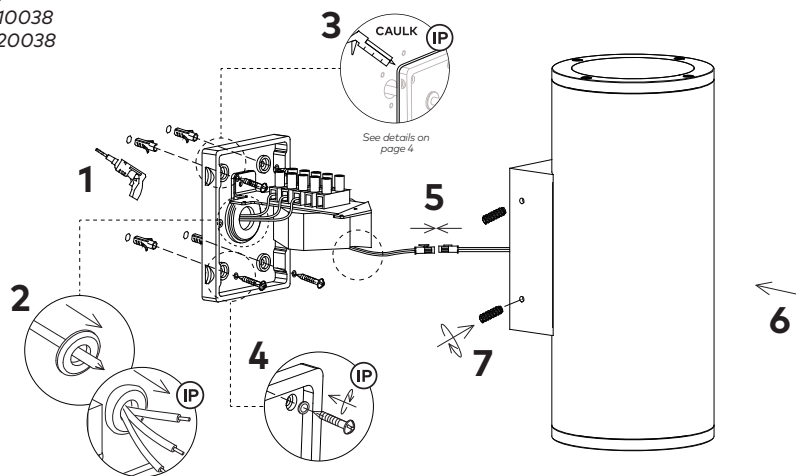

Catenary Accessory Installation

Catenary accessory (ATCA01) supplied separately.

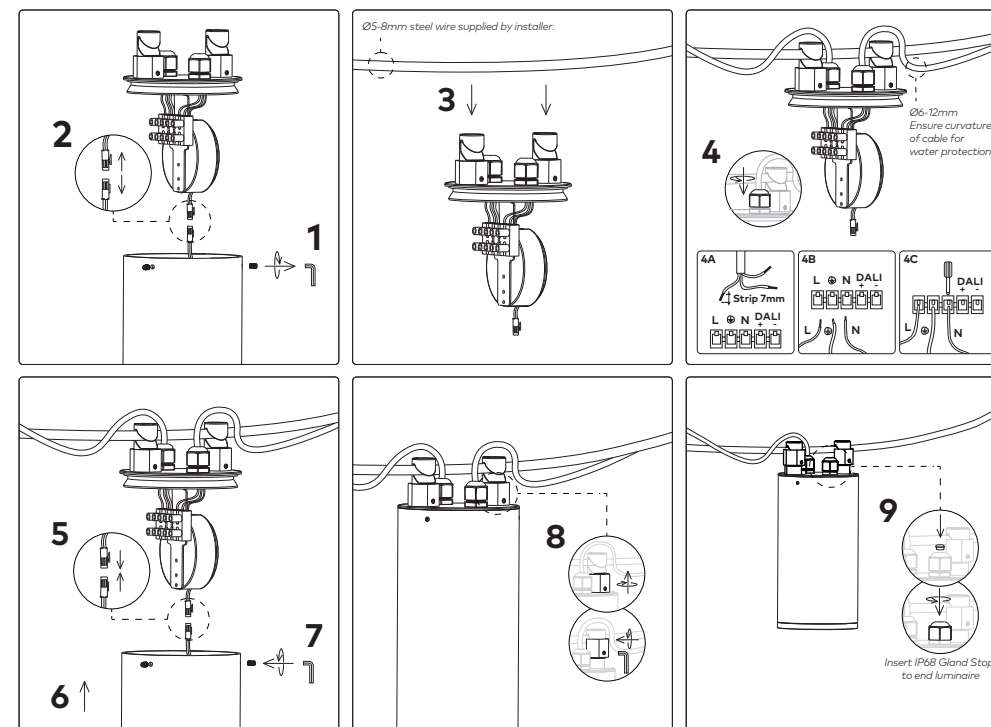

Wiring

Wiring (Built-in DALI)

