



Surge Protection

For comprehensive protection of a luminaire against electrical surges, surge protection shall be installed on the mains supply where required to protect luminaires and drivers from transient voltage damage.

For warranty information visit unios.com/warranty

Please read these installation instructions carefully before installing this luminaire. This product must be installed and maintained by a suitably qualified person/s in compliance with the latest applicable regulations and relevant legislation.

Unios does not warrant any claim based on defects or damage caused by misuse, improper installation, improper operation and/or modifications carried out by the purchaser or third parties. This luminaire will not be used as a 'Working light' during construction. This will result in the warranty of the luminaire to be void. For warranty duration, please refer to the data sheet.

Cleaning

Always clean carefully using a soft cloth and a ph-neutral, alcohol-free, non-abrasive cleaning cloth. Clean & Maintain the finish twice a year to avoid rust, oxidation or limescale deposits. If this entire surface is not cleaned correctly, the finish may become uneven.

Do not use abrasive pads, discs, sandpaper and/or high pressure hose/gun to clean the luminaire.

Disposal

Ensure correct disposal of this product (waste electrical and electronic equipment)



Kobe G2 Recessed Spotlight
Installation Instructions

unios.com/koberecessedims



Kobe G2 Surface Mounted Spotlight
Installation Instructions

unios.com/kobesmims



Kobe **G2**

TRACK LIGHT

Base Codes	Mini	Small	Medium
	KOBEN306	KOBES315	KOBEM325


IP20

Input Voltage	Material	Operating Temp	Install Person/s	Power
220–240V ~ 50/60Hz	Aluminium	<25°C	1x	6–25 Watts



CAUTION – This product must be installed by a qualified installer

Please read instruction manual carefully before installing luminaire

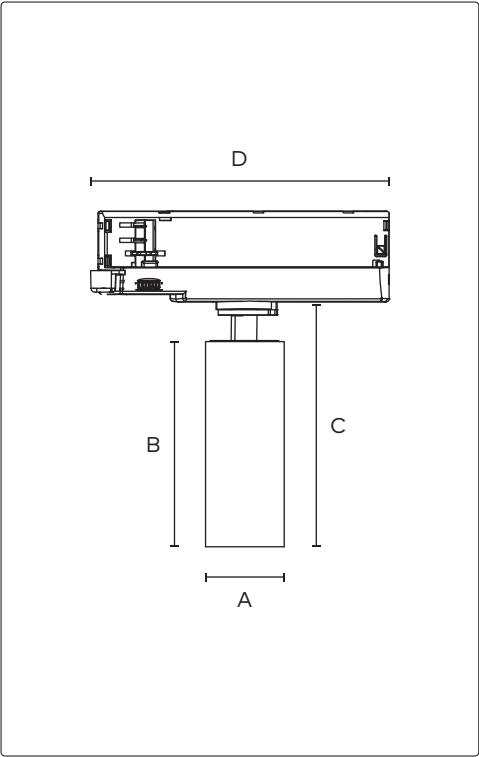


Sizing Variations

Product Code	A	B	C	D
KOBEN306	Ø40	80	100	189
KOBES315	Ø40	105	125	189
KOBEM325	Ø55	150	173	189


All measurements are in millimetres.



Additional Accessories



Product Assembly

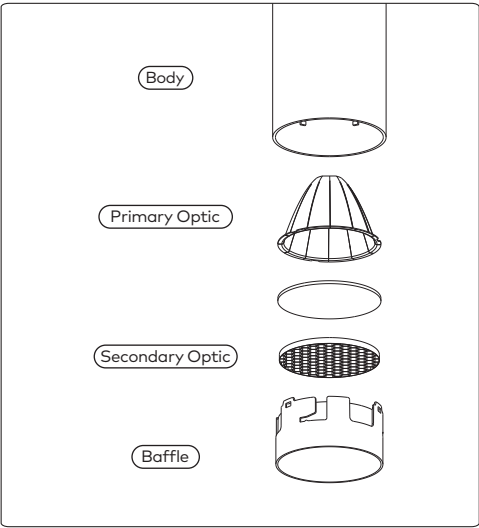



Product Installation

CAUTION




Switch off main electrical power prior to installing and powering this luminaire.

Do not open luminaire whilst the main electrical power is active.

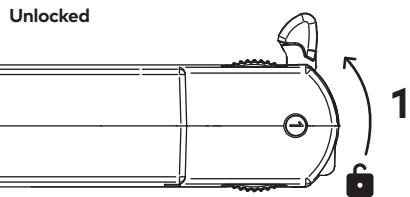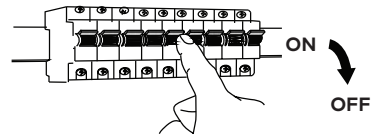


DAI models




Ensure track toggle is unlocked. (For DALI models, ensure secondary track toggle is also in unlocked position)


MX 1C Track




MX 3C Track




Align the markings on the luminaires track adaptor with the track.

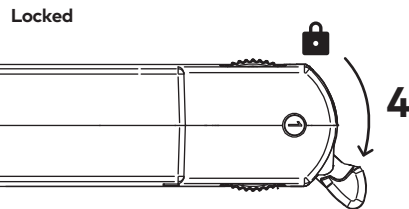

DAI models

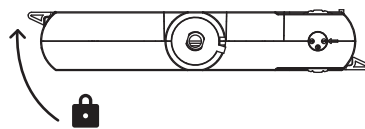


Switch track toggle to the locked position to lock luminaire in place.
(For DALI models, ensure secondary track toggle is also in locked position)



Insert luminaire into a suitable MX Track (Check Track compatibility Table).

Product Adjustments


Circuit Selection

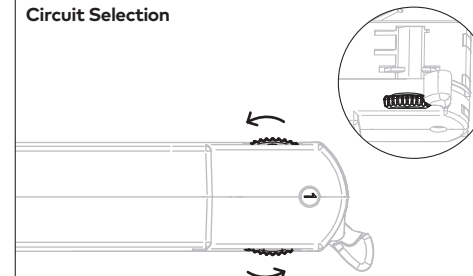

Sequence: ③ - Off - ① - Off - ②

Rotate dial to select desired track/circuit

Tilt & Rotation



Tilt and rotate product as desired

Track Compatibility

Track Adaptor	MX1	MX3	MX5
Single Circuit (<i>Phase-Cut</i>)	●	○	○
Three Circuit (<i>Phase-Cut</i>)	○	●	○
Three Circuit (<i>DALI</i>)	○	○	●
BasicDIM Wireless (<i>Bluetooth</i>)	○	●	●

Refer to the MX Track Instruction Manual Sheet for track wiring.

Dimming

Standard models are phase-cut dimmable. Unios recommends a phase-cut dimmer optimised for LED technology. DALI compatible drivers are also available.

If paired with Tempo Dim model, MX circuit must not be paired with a phase-cut dimmer. For full list of compatible drivers, see unios.com