Page 1/4 Unios.com

### Cleaning

Warning: Before cleaning, disconnect from mains supply and allow luminaire to cool.





## Disposal

Ensure correct disposal of this product (waste electrical and electronic equipment).



## **Corrosion Protection**

It is important to note that care must be taken during installation or maintenance to ensure that the surface of the luminaire is not damaged. Any damage, which is exposed to moisture will result in corrosion occurring.

Please also note that any chemical applications on the luminaire or chemical contact via installation will cause corrosion of the surface of the luminaire and will void the warranty.

#### **Ambient Conditions**

Recommended to install in an ambient temperature <35°C.



**Emerald** 

**SPOTLIGHT** 

Codes

**Emerald Spotlight** EMSP0025



Class I 220-240V ~ 50/60Hz IP Rating 65

Material Aluminium Install Person/s









Power

25 Watts



## CAUTION - This product must be installed by a qualified installer

Please read instruction manual carefully before installing luminaire




#### Surge Protection

For comprehensive protection of a luminaire against electrical surges, surge protection shall be installed on the mains supply where required to protect luminaires and drivers from transient voltage damage.

#### For warranty information visit unios.com/warranty

Please read these installation instructions carefully before installing this product. This product must be installed and maintained by a suitably qualified person/s in compliance with the latest applicable regulations and relevant legislation.

Unios does not warrant any claim based on defects or damage caused by misuse, improper installation, improper operation and/or modifications carried out by the purchaser or third parties. This product shall not be used as a 'working light' during construction. This will result in the warranty of the product to be void. For warranty duration, please refer to the data sheet.



## Sizing Variations

Product Code	Α	В	С	D
EMSP0025	Ø 105	130	Ø 119	35

All measurements are in millimetres.

#### **Parts**




















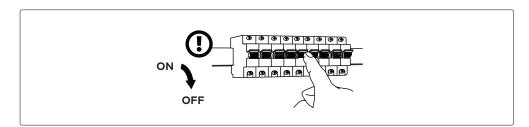

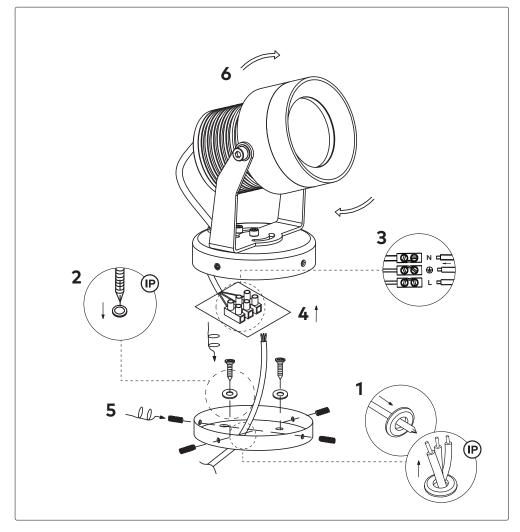

# Wiring



# **Driver Compatibility**


Product Code	Output Power	Driving Current	Forward Voltage
EMSP0025	25W	500mA	36-38V

# **Dimming**

This luminaire can be dimmed. Unios® recommends a phase-cut dimmer optimised for LED technology. For non-standard configurations refer to driver data sheet.

For full list of compatible drivers, see unios.com

# **Mounting Plate**



All measurements are in millimetres.