



Removal & Adjustment

Pull out luminaire to remove or reposition.
Do not slide off track.

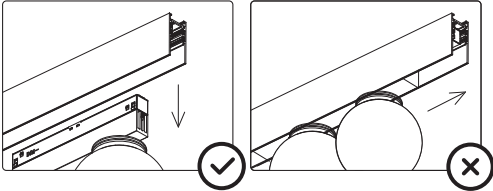

Cleaning

Warning: Before cleaning, disconnect from mains supply and allow luminaire to cool.

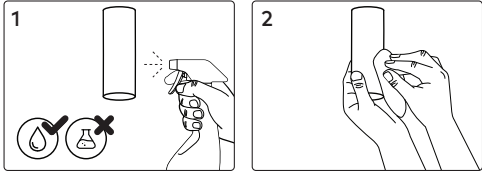

Disposal

Ensure correct disposal of this product (waste electrical and electronic equipment)



Dimming

FX 48V Track luminaires can be dimmed. Unios recommends a 1-10V dimmer or DALI system optimised for LED technology. For non-standard configurations refer to driver data sheet.

For full list of compatible drivers, see unios.com

For instructions on setting up Casambi, please visit unios.com/casambi.

Corrosion Protection

It is important to note that care must be taken during installation or maintenance to ensure that the surface of the luminaire is not damaged. Any damage, which is exposed to moisture will result in corrosion occurring.

Please also note that any chemical applications on the luminaire or chemical contact via installation will cause corrosion of the surface of the luminaire and will void the warranty.

Ambient Conditions

Recommended to install in an ambient temperature <35°C.



FX Orb Light

48V TRACK SERIES




Base Codes	R100 Double R100DB12	P100 Pendant P100XX06	Power 6 12 Watts
Class III 48V DC	IP Rating 20	Material Aluminium	Install Person/s 1x

CAUTION – This product must be installed by a qualified installer
Please read instruction manual carefully before installing luminaire


Surge Protection
For comprehensive protection of a luminaire against electrical surges, surge protection shall be installed on the mains supply where required to protect luminaires and drivers from transient voltage damage.

For warranty information visit unios.com/warranty
Please read these installation instructions carefully before installing this product. This product must be installed and maintained by a suitably qualified person/s in compliance with the latest applicable regulations and relevant legislation. Unios does not warrant any claim based on defects or damage caused by misuse, improper installation, improper operation and/or modifications carried out by the purchaser or third parties. This product shall not be used as a 'working light' during construction. This will result in the warranty of the product to be void. For warranty duration, please refer to the data sheet.

Double Orb Light
R100DB12



Orb Pendant
P100XX06




Sizing Variations

Product Code	A	B	C
R100DB12	Ø 100	166	205
P1002506	Ø 100	166	2500
P1005006	Ø 100	166	5000

All measurements are in millimetres.



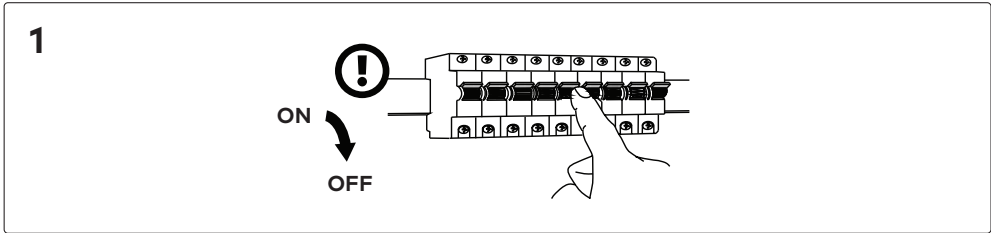


Double Orb Light

R100DB12


Orb Pendant

P100XX06

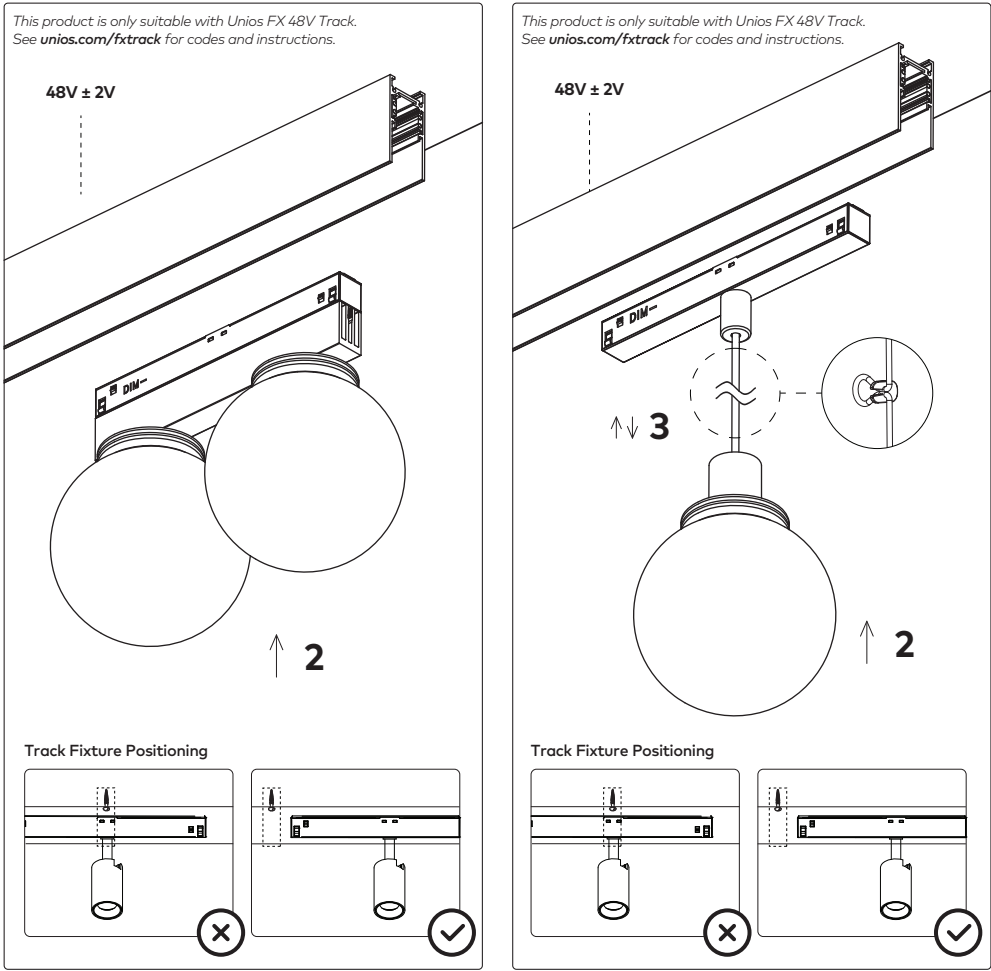

Pendant Ceiling Hook (Optional)

Suitable for the Orb Pendant (P100XX06) model. Sold separately.

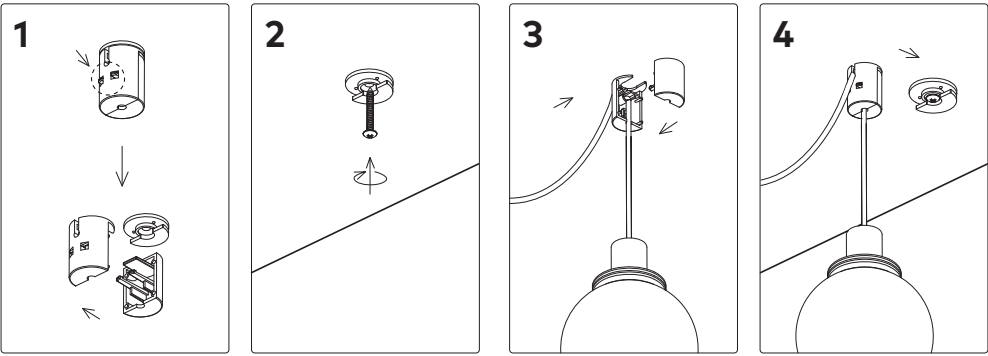

! IMPORTANT – Polarity

DALI configurations are not polarity sensitive.

