
IP65/66 Installations

Failure to provide a suitable installation area will lead to water ingress and will void the product's warranty.

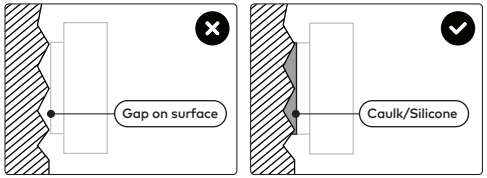


Fixture needs to be installed on a flat, level surface. Caulking & use of silicone on all wall plates/mounts is mandatory on uneven or porous surface. Use caulk or silicone to fill gaps between back plate and surface. Do not caulk or apply silicone on the factory provided seal as it will have an adverse sealing effect.

Refer to the Warranty Terms & Conditions. For more information see unios.com/warranty.

Cleaning

Warning: Before cleaning, disconnect from mains supply and allow luminaire to cool.

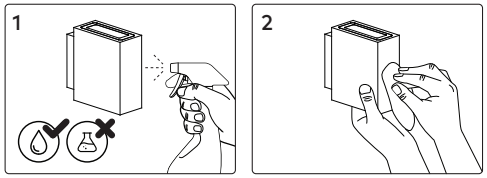

Corrosion Protection

It is important to note that care must be taken during installation or maintenance to ensure that the surface of the luminaire is not damaged. Any damage, which is exposed to moisture will result in corrosion occurring.

Please also note that any chemical applications on the luminaire or chemical contact via installation will cause corrosion of the surface of the luminaire and will void the warranty.

Ambient Conditions

Recommended to install in an ambient temperature <35ºC.

Disposal

Ensure correct disposal of this product (waste electrical and electronic equipment).

Moonstone

WALL LIGHT

Base Codes	Moonstone Wall Light MOON0006			Power 6 Watts
Class I 220–240V ~ 50/60Hz	**IP Rating** 65	**Material** Aluminium	**Install Person/s** 1x	


CAUTION – This product must be installed by a qualified installer
Please read instruction manual carefully before installing luminaire

Surge Protection
For comprehensive protection of a luminaire against electrical surges, surge protection shall be installed on the mains supply where required to protect luminaires and drivers from transient voltage damage.

For warranty information visit unios.com/warranty

Please read these installation instructions carefully before installing this product. This product must be installed and maintained by a suitably qualified person/s in compliance with the latest applicable regulations and relevant legislation.

Unios does not warrant any claim based on defects or damage caused by misuse, improper installation, improper operation and/or modifications carried out by the purchaser or third parties. This product shall not be used as a 'working light' during construction. This will result in the warranty of the product to be void. For warranty duration, please refer to the data sheet.

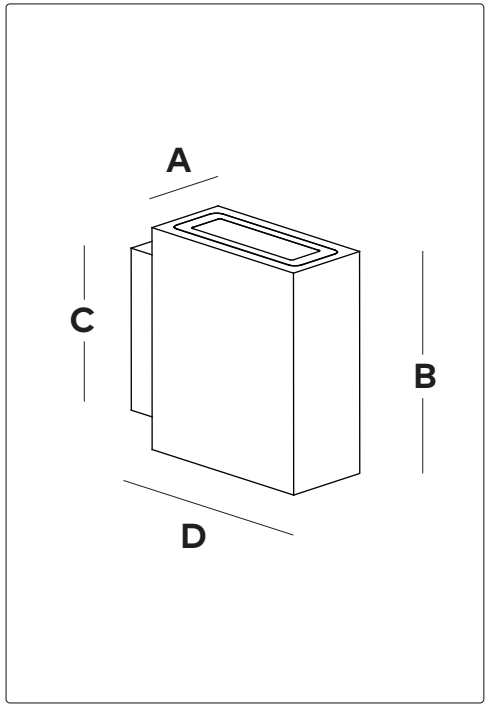



Sizing Variations


Product Code	A	B	C	D
MOON0006	40	100	73	100

All measurements are in millimetres.


Parts

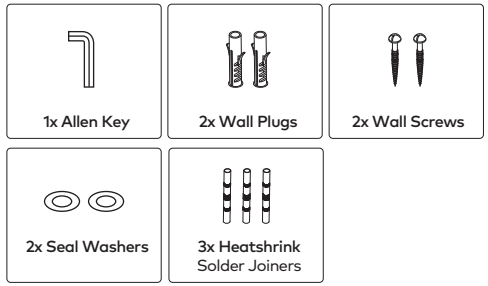


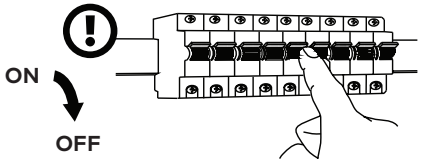

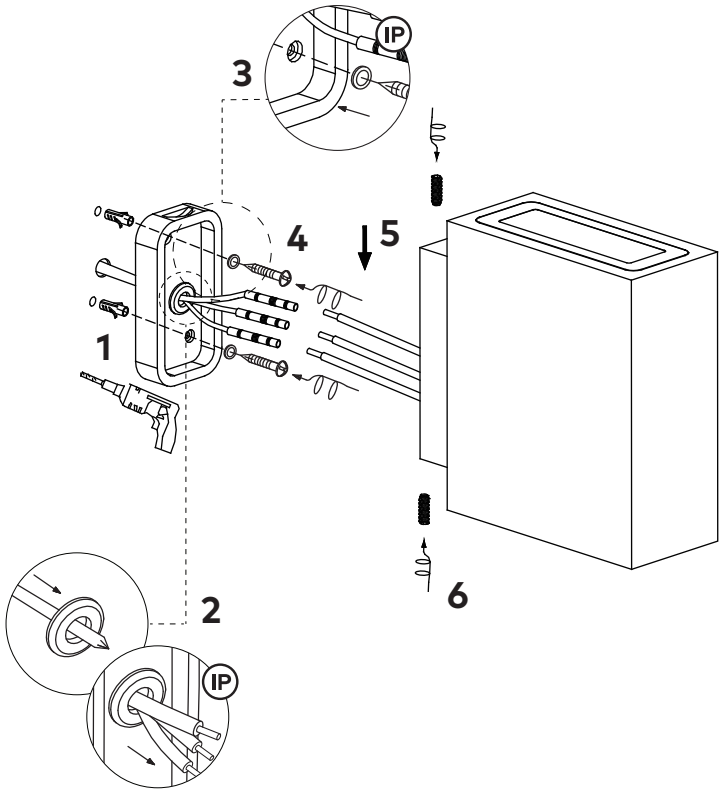


Wiring

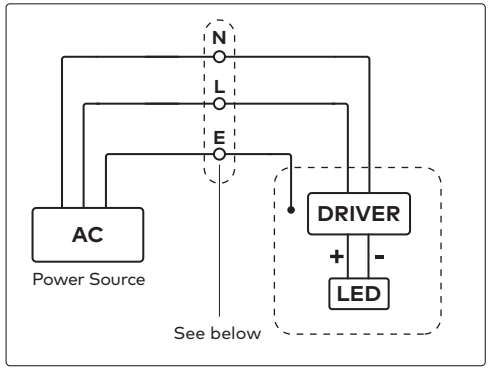

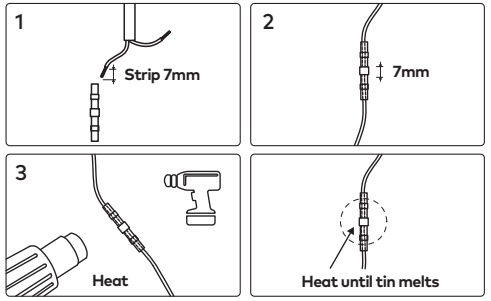

Mounting Plate

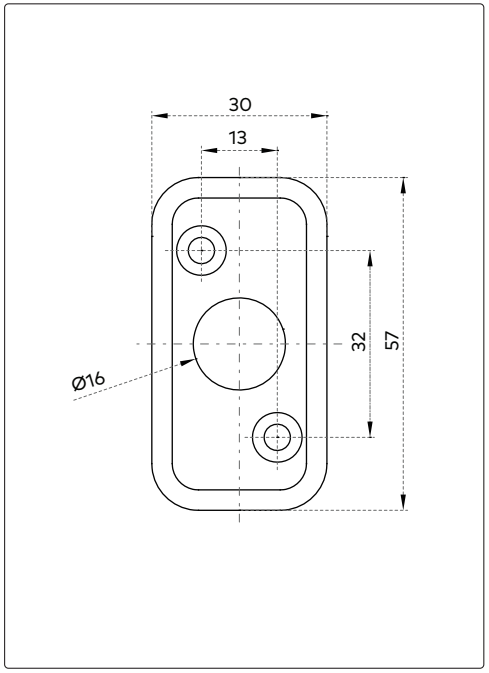

All measurements are in millimetres

Driver Compatibility

Product Code	Output Power	Driving Current	Forward Voltage
MOON0006	6W	500mA	11-13V

Dimming

This luminaire can be dimmed. Unios® recommends a phase-cut dimmer optimised for LED technology. For non-standard configurations refer to driver data sheet.

For full list of compatible drivers, see unios.com