

**Surge Protection**

For comprehensive protection of a luminaire against electrical surges, surge protection shall be installed on the mains supply where required to protect luminaires and drivers from transient voltage damage.

For warranty information visit unios.com/warranty

Please read these installation instructions carefully before installing this luminaire. This product must be installed and maintained by a suitably qualified person/s in compliance with the latest applicable regulations and relevant legislation.

Unios does not warrant any claim based on defects or damage caused by misuse, improper installation, improper operation and/or modifications carried out by the purchaser or third parties. This luminaire will not be used as a 'Working light' during construction. This will result in the warranty of the luminaire to be void. For warranty duration, please refer to the data sheet.

Cleaning

Always clean carefully using a soft cloth and a ph-neutral, alcohol-free, non-abrasive cleaning cloth. Clean & Maintain the finish twice a year to avoid rust, oxidation or limescale deposits. If this entire surface is not cleaned correctly, the finish may become uneven.

Do not use abrasive pads, discs, sandpaper and/or high pressure hose/gun to clean the luminaire.

Disposal

Ensure correct disposal of this product (waste electrical and electronic equipment)









Kobe G2 Track Light
Installation Instructions
unios.com/kobetracklms



Kobe G2 Recessed Spotlight
Installation Instructions
unios.com/koberecessedlms

**Kobe G2****SURFACE MOUNTED SPOTLIGHT**Base
CodesMini
KOBENS08Small
KOBESS15Medium (15W)
KOBEMS15Medium (25W)
KOBEMS25

IP20

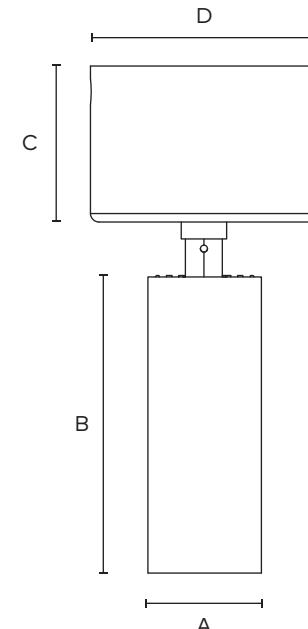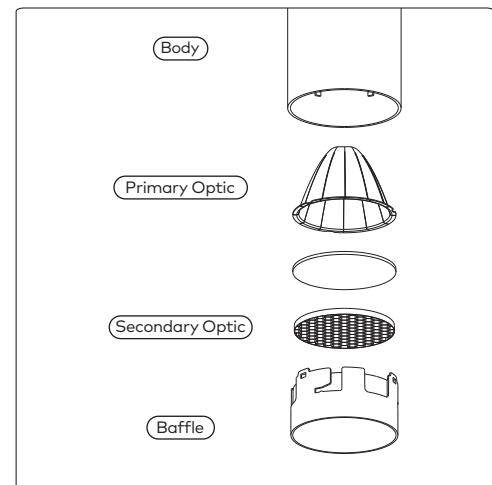Class I
220-240V ~ 50/60HzMaterial
AluminiumOperating Temp
<25°CInstall Person/s
1x Power
8-25 Watts**CAUTION – This product must be installed by a qualified installer***Please read instruction manual carefully before installing luminaire***Parts & Accessories**2mm Hex Allen Key
IncludedM4 30mm Screws
Included**Additional Accessories**Reflectors
See data sheetDiffusers
See data sheet**Product Assembly****Sizing Variations**

Product Code	A	B	C	D
KOBENS08	Ø40	80	28	Ø35
KOBESS15	Ø40	105	55	Ø80
KOBEMS15	Ø55	150	55	Ø100
KOBEMS25				

All measurements are in millimetres.


Product Installation

CAUTION




Switch off main electrical power prior to installing and powering this luminaire.

Do not open luminaire whilst the main electrical power is active.

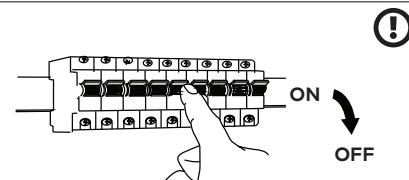


Mounting Bracket




Size	A	B
Mini	32	16
Small	70	44
Medium	90	72

All measurements are in millimetres.

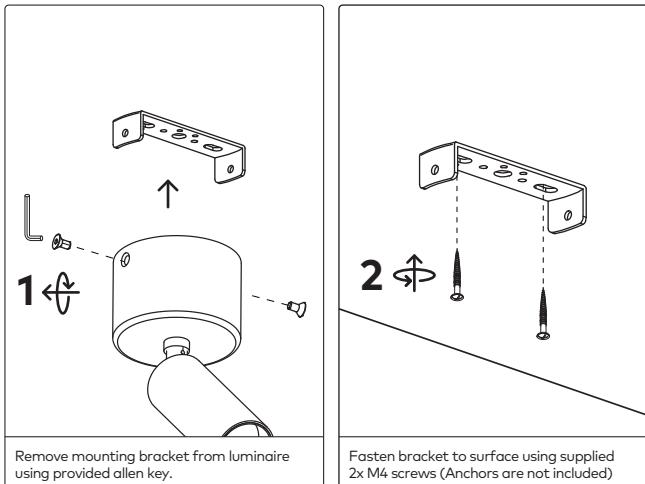

Remove mounting bracket from luminaire using provided allen key.

Fasten bracket to surface using supplied 2x M4 screws (Anchors are not included)


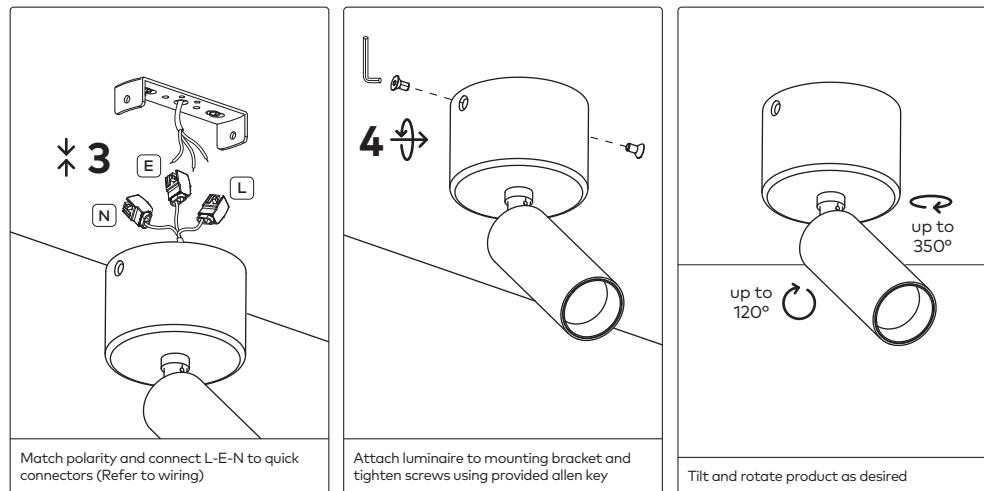


Match polarity and connect L-E-N to quick connectors (Refer to wiring)

Attach luminaire to mounting bracket and tighten screws using provided allen key

Tilt and rotate product as desired

Wiring

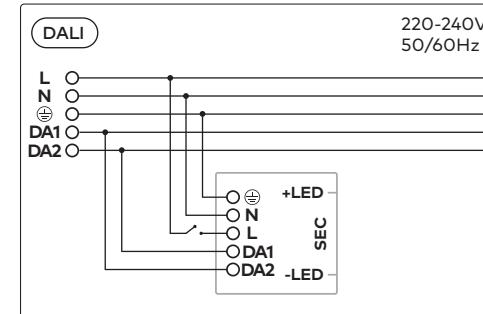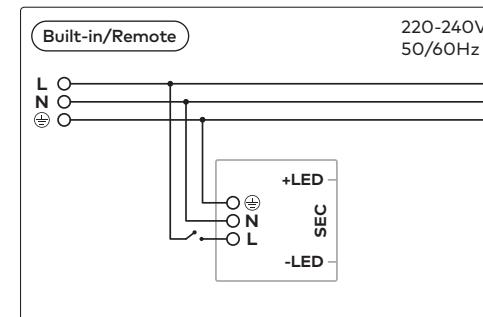

Dimming

Standard models are phase-cut Dimmable. Unios recommends a phase-cut dimmer optimised for LED technology. DALI compatible drivers are also available.

For full list of compatible drivers, see unios.com