


IP65/66 Installations

! Failure to provide a suitable installation area will lead to water ingress and will void the product's warranty.

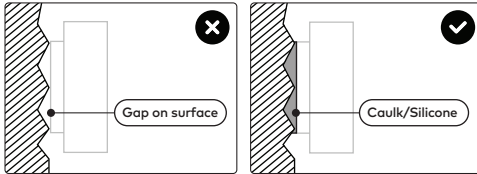


Fixture needs to be installed on a flat, level surface. Caulking & use of silicone on all wall plates/mounts is mandatory on uneven or porous surface. Use caulk or silicone to fill gaps between back plate and surface. Do not caulk or apply silicone on the factory provided seal as it will have an adverse sealing effect.

Refer to the Warranty Terms & Conditions. For more information see unios.com/warranty.

Cleaning

Warning: Before cleaning, disconnect from mains supply and allow luminaire to cool.

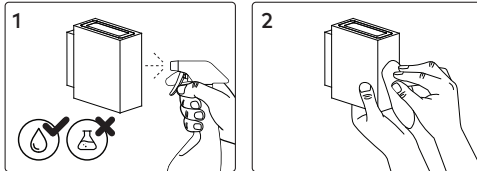

Corrosion Protection

It is important to note that care must be taken during installation or maintenance to ensure that the surface of the luminaire is not damaged. Any damage, which is exposed to moisture will result in corrosion occurring.

Please also note that any chemical applications on the luminaire or chemical contact via installation will cause corrosion of the surface of the luminaire and will void the warranty.

Ambient Conditions

Recommended to install in an ambient temperature <35°C.



Disposal

Ensure correct disposal of this product (waste electrical and electronic equipment).



Onyx

SPOTLIGHT

Base Codes	One ONSP0007	Two ONSP0014	Three ONSP0021	Power 7 14 21 Watts
	Class I 220-240V ~ 50/60Hz	IP Rating 65	Material Aluminium	Install Person/s 1x

! **CAUTION – This product must be installed by a qualified installer**
Please read instruction manual carefully before installing luminaire

Surge Protection
For comprehensive protection of a luminaire against electrical surges, surge protection shall be installed on the mains supply where required to protect luminaires and drivers from transient voltage damage.

For warranty information visit unios.com/warranty



Please read these installation instructions carefully before installing this product. This product must be installed and maintained by a suitably qualified person/s in compliance with the latest applicable regulations and relevant legislation. Unios does not warrant any claim based on defects or damage caused by misuse, improper installation, improper operation and/or modifications carried out by the purchaser or third parties. This product shall not be used as a 'working light' during construction. This will result in the warranty of the product to be void. For warranty duration, please refer to the data sheet.

Sizing Variations

Product Code	A	B	C
ONSP0007	Ø 69	27	143
ONSP0014	Ø 120	35	147
ONSP0021	352 x 55	30	145

All measurements are in millimetres.

Parts

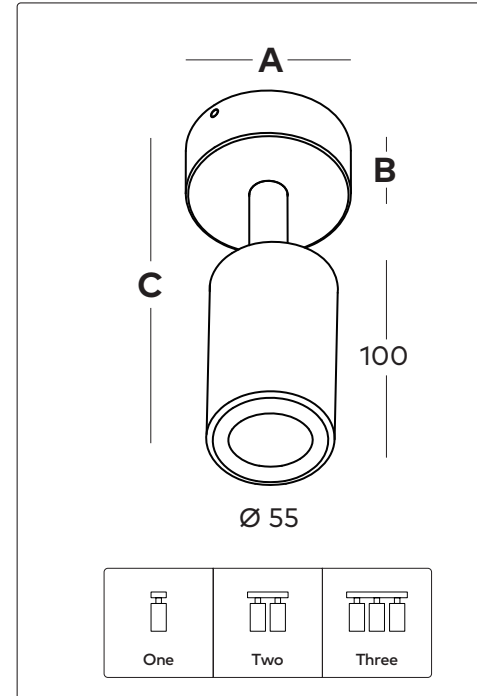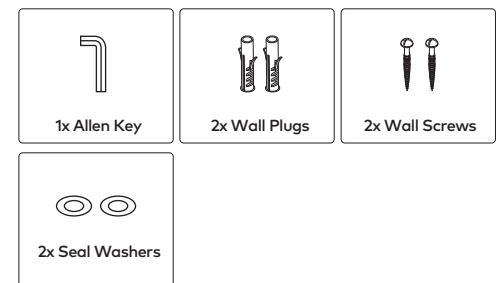


Corrosion Protection



Please note that care must be taken during installation or maintenance to ensure that the surface of the luminaire is not damaged. Any damage, which is exposed to moisture will result in corrosion occurring.

Onyx One ONSP0007

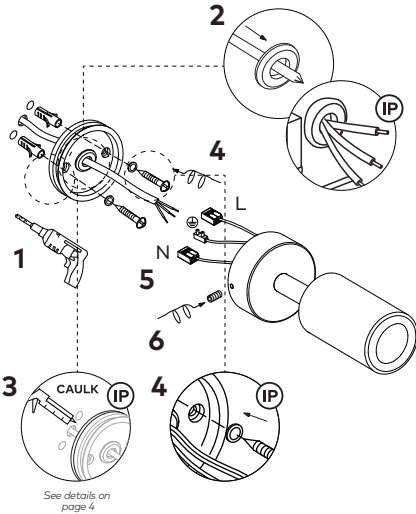

See details on page 4


Please also note that any chemical applications on the luminaire or chemical contact via installation will cause corrosion of the surface of the luminaire and will void the warranty.

Ambient Conditions

Recommended to install in an ambient temperature <35°C.


Disposal

Ensure correct disposal of this product (waste electrical and electronic equipment).

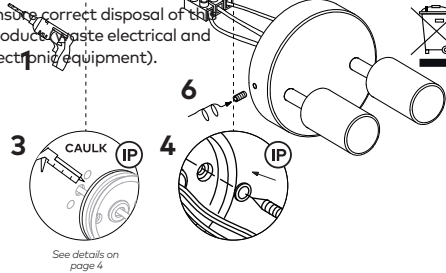


See details on page 4

Onyx Three ONSP0021

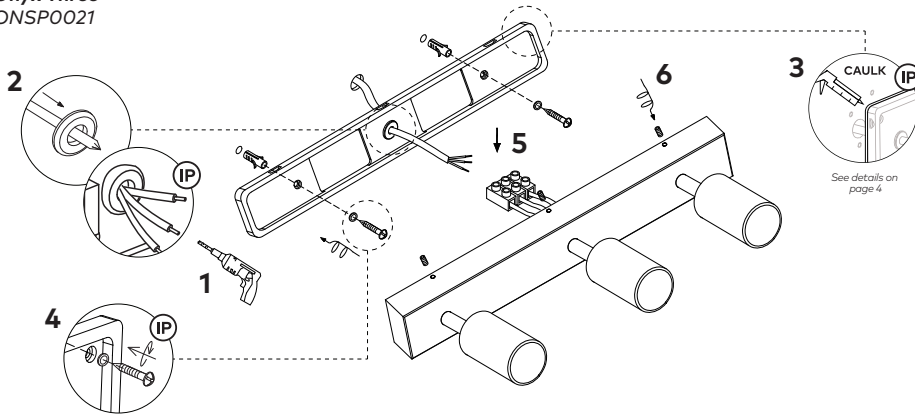

See details on page 4

Wiring

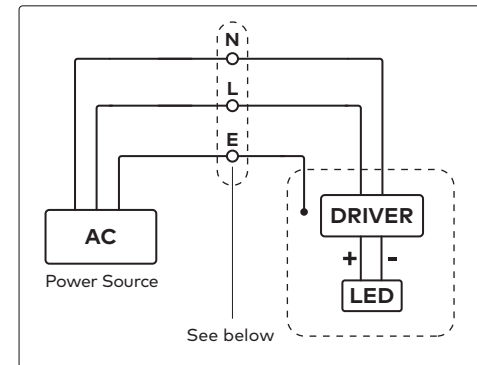

Driver Compatibility

Product Code	Output Power	Driving Current	Forward Voltage
ONSP0007	7W	700mA	8-10V
ONSP0014	14W	300mA	35-37V
ONSP0021	21W	600mA	26-28V


Dimming

This luminaire can be dimmed. Unios® recommends a phase-cut dimmer optimised for LED technology. For non-standard configurations refer to driver data sheet.


For full list of compatible drivers, see unios.com

Mounting Plate


ONSP0007



ONSP0014



ONSP0021

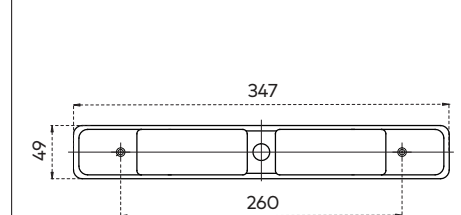

All measurements are in millimetres