
IP65/66 Installations

Failure to provide a suitable installation area will lead to water ingress and will void the product's warranty.

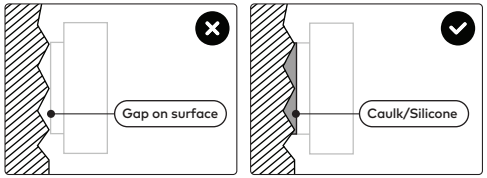


Fixture needs to be installed on a flat, level surface. Caulking & use of silicone on all wall plates/mounts is mandatory on uneven or porous surface. Use caulk or silicone to fill gaps between back plate and surface. Do not caulk or apply silicone on the factory provided seal as it will have an adverse sealing effect.

Refer to the Warranty Terms & Conditions. For more information see unios.com/warranty.

Cleaning

Warning: Before cleaning, disconnect from mains supply and allow luminaire to cool.

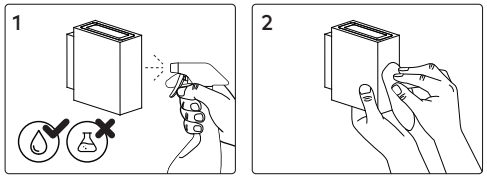

Corrosion Protection

It is important to note that care must be taken during installation or maintenance to ensure that the surface of the luminaire is not damaged. Any damage, which is exposed to moisture will result in corrosion occurring.

Please also note that any chemical applications on the luminaire or chemical contact via installation will cause corrosion of the surface of the luminaire and will void the warranty.

Ambient Conditions

Recommended to install in an ambient temperature <35ºC.

Disposal

Ensure correct disposal of this product (waste electrical and electronic equipment).

Vega G2

WALL LIGHT

Base Codes	Open Face	Eyelid	Power
	VEGA0012	VEGE0012	12 Watts

Class II	IP Rating	Material	Install Person/s
220-240V ~ 50/60Hz	65	Polycarbonate	1x

CAUTION – This product must be installed by a qualified installer
Please read instruction manual carefully before installing luminaire


Surge Protection
For comprehensive protection of a luminaire against electrical surges, surge protection shall be installed on the mains supply where required to protect luminaires and drivers from transient voltage damage.

For warranty information visit unios.com/warranty


Please read these installation instructions carefully before installing this product. This product must be installed and maintained by a suitably qualified person/s in compliance with the latest applicable regulations and relevant legislation.

Unios does not warrant any claim based on defects or damage caused by misuse, improper installation, improper operation and/or modifications carried out by the purchaser or third parties. This product shall not be used as a 'working light' during construction. This will result in the warranty of the product to be void. For warranty duration, please refer to the data sheet.

VEGA0012



VEGE0012



Sizing Variations

Product Code	A	B
VEGA0012	Ø 265	92
VEGE0012	Ø 265	95

All measurements are in millimetres.


Parts



1x Allen Key


2x Wall Plugs



2x Wall Screws



2x Deep Washers

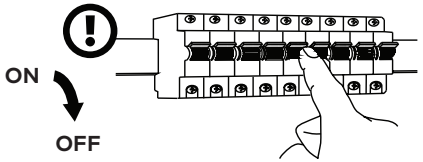

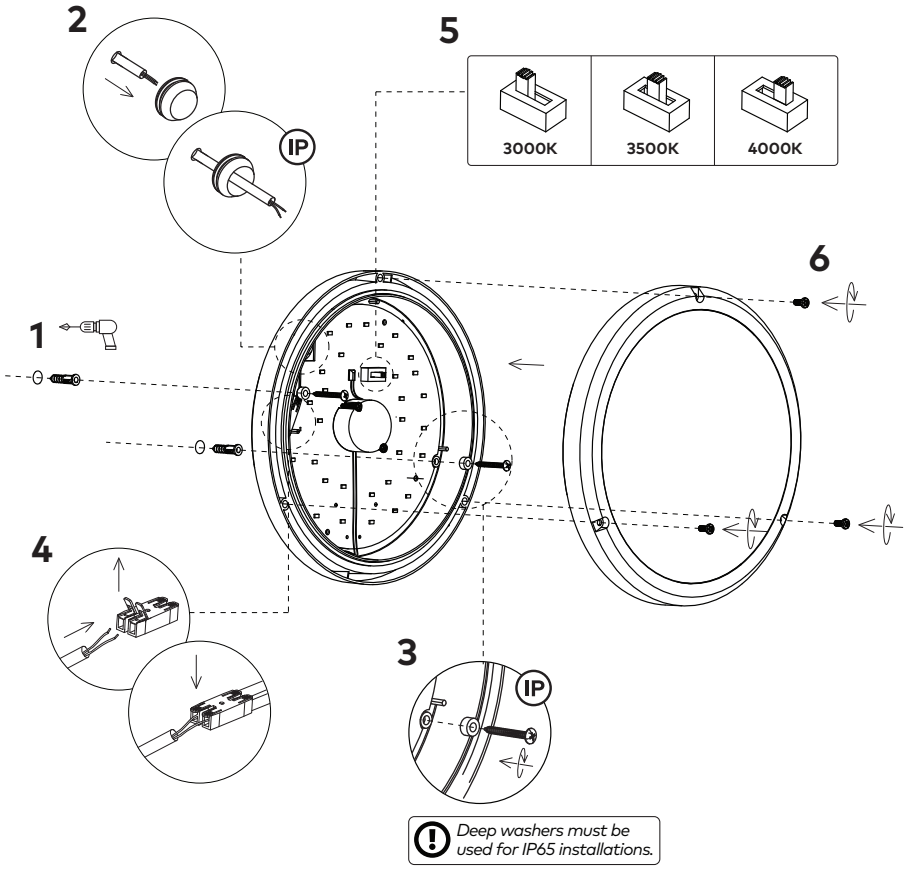

Wiring

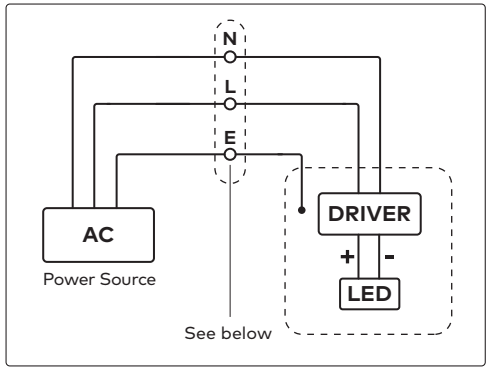

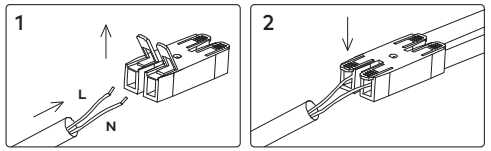


Driver Compatibility

Product Code	Output Power	Driving Current	Forward Voltage
VEGA0012	12W	350mA	34-36V
VEGE0012	12W	350mA	34-36V

Dimming

This luminaire can not be dimmed.
Specific DALI option available.

Mounting Plate

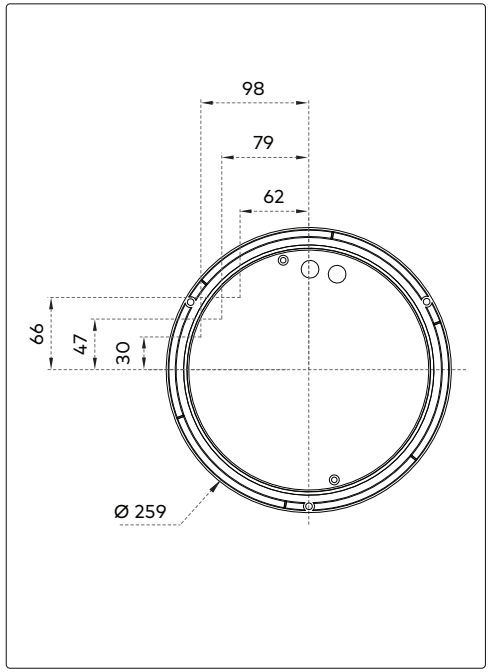

All measurements are in millimetres.