Page 1/4 Unios.com

### Cleaning

Warning: Before cleaning, disconnect from mains supply and allow luminaire to cool.





# Disposal

Ensure correct disposal of this product (waste electrical and electronic equipment).



### **Corrosion Protection**

It is important to note that care must be taken during installation or maintenance to ensure that the surface of the luminaire is not damaged. Any damage, which is exposed to moisture will result in corrosion occurring.

Please also note that any chemical applications on the luminaire or chemical contact via installation will cause corrosion of the surface of the luminaire and will void the warranty.

### **Ambient Conditions**

Recommended to install in an ambient temperature <45°C.



# Compass





Base Small Medium Large COMP0086 COMP0125 Codes COMP0175



Class III 24V DC IP Rating 67

Material Aluminium

Install Person/s







6 | 11 | 15 Watts

Power



### CAUTION - This product must be installed by a qualified installer

Please read instruction manual carefully before installing luminaire




#### Surge Protection


For comprehensive protection of a luminaire against electrical surges, surge protection shall be installed on the mains supply where required to protect luminaires and drivers from transient voltage damage.

#### For warranty information visit unios.com/warranty

Please read these installation instructions carefully before installing this product. This product must be installed and maintained by a suitably qualified person/s in compliance with the latest applicable regulations and relevant legislation.

Unios does not warrant any claim based on defects or damage caused by misuse, improper installation, improper operation and/or modifications carried out by the purchaser or third parties. This product shall not be used as a 'working light' during construction. This will result in the warranty of the product to be void. For warranty duration, please refer to the data sheet.





### Sizing Variations

Product Code	Α	В	С	
COMP0086				
Luminaire	130	Ø 86	<b>B</b> 74	
Canister	136	Ø 82	Ø 65	
COMP0125				
Luminaire	145	Ø 125	<b>B</b> 104	
Canister	153	Ø 111	Ø 85	
COMP0175				
Luminaire	188	Ø 175	<b>B</b> 150	
Canister	231	Ø 160	Ø 203	

All measurements are in millimetres.


### **Parts**












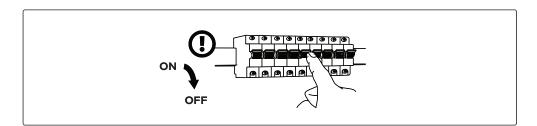

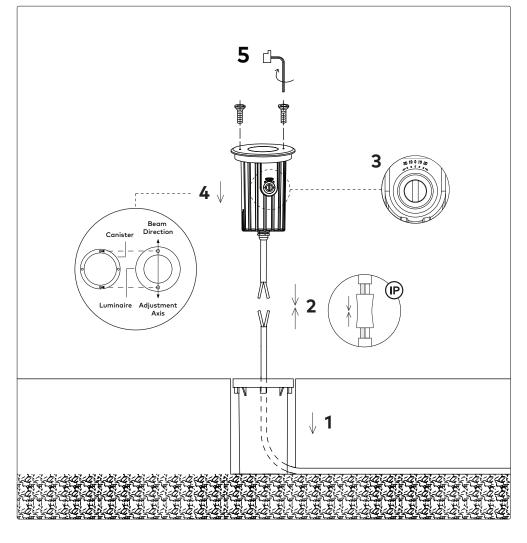


# Wiring





## **IP67 Connection**



## **Driver Selection**

Product Code	Output Power	Forward Voltage
COMP0086	6W	24VDC
COMP0125	11W	24VDC
COMP0175	15W	24VDC

### Dimming

This luminaire can not be dimmed. Specific DALI option available.

